

# BALANCE, ISOTHERMS AND KINETICS OF REACTIVE YELLOW 86 COMMENCING SOLUTION BY BALSAMODENDRON CAUDATUM WOOD WASTE ACTIVATED NANO PERMEABLE CARBON MATERIAL

**B. Sivakumar<sup>1,\*</sup>, M.Vijayalakshmi<sup>2</sup> and A. Babu Rajendran<sup>3</sup>**

<sup>1</sup>Department of Chemistry, Angel College of Engineering and Technology, Tirupur,641665,TamilNadu, India.

<sup>2</sup>Department of Chemistry, Nandha Engineering College, Erode, 638052,TamilNadu, India.

<sup>3</sup>P.G. Assistant in Chemistry, Govt. HR. Sec. School, Dhalavoipatnam, Tirupur,638672,TamilNadu, India.

\*E-mail: bbsivakumarbb@gmail.com

---

## ABSTRACT

The adsorption capacity of *Balsamodendroncaudatum* wood waste virtual to Reactive yellow 86was tested in fabric wastewater organization .*Balsamodendroncaudatum* wood waste activated nano porous carbon material (BANCM) was treated by sulphuric acid to pick and choose up adsorption competence for the elimination of Reactive yellow 86 ( C.I. No 70865-29-1) from aqueous solution. The treated (BANCM) with sulphuric acid was analyzed bySEM,XRD, FT-IR and TGA-DTA Analysis.Present study deals with the use of BANCMwaste as an adsorbent for the removal of Reactive yellow 86dye from its aqueous solutions.The studies show that sorption is powered by initial dye concentration, dye solution pH and adsorption temperature have been investigated in the present study. Isotherms for the sorption of Reactive yellow 86on (BANCM)were tested by the Freundlich and Langmuir isotherm equations. A Kinetic study of dye followed the pseudo-first-order, pseudo second-order and Elovich models respectively .Equilibrium isotherms for the adsorption of Reactive yellow 86on (BANCM)were analyzed by the Langmuir isotherm. Up shot indicate that the pseudo-first-order kinetic model was found to compare the investigational statistics fit.

**Keywords:** adsorption, reactive yellow 86, kinetics, low-cost adsorbents, aqueous solution

© RASĀYAN. All rights reserved

---

## INTRODUCTION

Water is essential to all forms of life. It acts as a medium, catalyst and applicant in various chemical reactions occurring in our environment. In natural history, a no of dictatorial mechanisms plays and vital role in controlling the physic-chemical properties of important as well as the number and types of its biological populations. Irrespective of basis, it constantly contains a complex mixture of organic and inorganic substances main of which are of natural origin resulting from complex contact between water, soil and underlying environmental status.

The biological and microbiological process taking place in soil and water. Balanced and colloidal mineral matter, plant detritus, algae and protozoa are also commonly established and reported<sup>1</sup>.There has been proof of a connection between arsenic levels in water and frequency of skin cancer<sup>2</sup>.

Activated nano porous carbon is costly and its recovery and use gain create it more costly<sup>3</sup>. However, in observation of the high cost and related problems of regeneration, there is a regular search for alternate low-cost adsorbents. Such types of adsorbents comprise pine tree leaves<sup>4</sup>, bagasse fly ash<sup>5</sup>, rice husk ash<sup>6</sup>, (*Arundo donax*) reeds<sup>7</sup>, red mud<sup>8</sup>,TiO<sub>2</sub> nanocomposites<sup>9</sup> agricultural waste and timber industry waste carbons for the exclusion of various dyes from wastewaters<sup>10</sup>. Significant review of low-cost adsorbents for wastewater treatment has been offered by earlier researchers<sup>11</sup>.

## EXPERIMENTAL

### Adsorbent

*Balsamo dendron caudatum* timber ravage was gained from a range of places of Coimbatore & Tirupur Districts, Tamil Nadu, and India. The learning of *Balsamo dendron caudatum* wood squander matter is used as the adsorbent is anticipated to be low-cost, environmentally safe and it has a realistic implications. To build up adsorbents, the textile was first ground and washed with distilled water and then dried out. The dried substance thus obtained was treated with hydrogen peroxide (40w/v) at room temperature for concerning 24 hrs to oxidize the adhering organic substance. The resulting substance was systematically washed with twice as distilled water and then subjected to the temperature of 120°C for the wetness removal. One part of the above material was covered with water well with a sulphuric acid solution for a period of 24 hours. At the end of 24 hrs. Then the materials were positioned in the muffle furnace carbonized at 120-130°C. The dried materials were pulverized and activated in a muffle furnace kept at 800°C for a period of 60 minutes. After commencement, the obtained carbon was washed suitably with a large volume of water to eliminate free acid. Then obtained substance was washed with an abundance of water to eliminate the excess of acid, dried than to preferred particle size. The resultant carbon named as BANCM.

### Preparation of aqueous dye solution

The stock solutions of the dye (1000 ppm) were equipped by dissolving 1 g of dye in one liter of water without any more treatment. For group study, an aqueous solution of this dye was arranged from stock solutions in deionized water.

Table -1: Individuality of the dye used

Category	Sample	General name	C.I. No.	Mw
Reactive	RE 86	Reactive yellow 86	70865-29-1	667.357

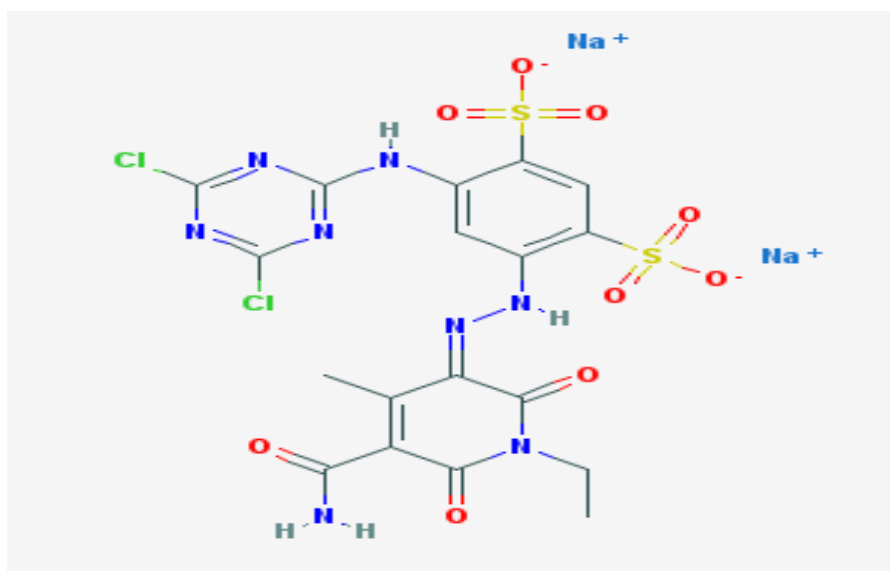


Fig.-1: Structure of Reactive yellow 86

### The pseudo first – order equation

The pseudo first - order equation<sup>12</sup> is generally expressed as follows:

$$\frac{dq_t}{dt} = k_1(q_e - q_t) \quad (1)$$

Where,  $q_e$  and  $q_t$  are the adsorption capacity at equilibrium and at time  $t$ , respectively ( $\text{mg g}^{-1}$ ),  $k_1$  is the rate constant of pseudo-first order adsorption ( $\text{l min}^{-1}$ ).

### The Pseudo Second – Order Equation

The pseudo second-order adsorption kinetic rate equation is expressed as<sup>13</sup>

$$\frac{dq_t}{dt} = k_2(q_e - q_t)^2 \quad (2)$$

Where,  $k_2$  is the rate constant of pseudo-second order adsorption ( $\text{g. mg}^{-1}. \text{min}^{-1}$ ). where,  $k_2$  is the rate constant of pseudo-second order sorption ( $\text{g. mg}^{-1}. \text{min}^{-1}$ ). If the first sorption rate  $h$  ( $\text{mg g}^{-1} \text{min}^{-1}$ ) is

$$h = k_2 q_e^2 \quad (3)$$

### The Elovich Equation

The Elovich model equation is normally expressed<sup>14</sup> as:

$$\frac{dq_t}{dt} = \alpha \exp(-\beta q_t) \quad (4)$$

Where,  $\alpha$  is the initial adsorption rate ( $\text{mg.g}^{-1} \text{min}^{-1}$ ),  $\beta$  is the sorption constant ( $\text{g. mg}^{-1}$ ) during any one conduct test.

## RESULTS AND DISCUSSION

### Characterization of sorbent

The exterior area of the BANCM was designed throughout  $\text{N}_2$  sorption at 77K using a NOVA1000, Quanta chrome company. The pH of BANCM was measured by a PHS-3C pH meter. pH of zero charges (pHpzc) of the samples was definite using pH drift method<sup>15</sup>. The surface area of the BANCM obtained from the  $\text{N}_2$  equilibrium sorption isotherms was found to be  $760 \text{ m}^2/\text{g}$ . The outcome of “pH drift” test, from which the pHpzc of BANCM studied in this test was found to be the 4. The better color removal of the dye, Reactive yellow 86, was notified at pH of 6.

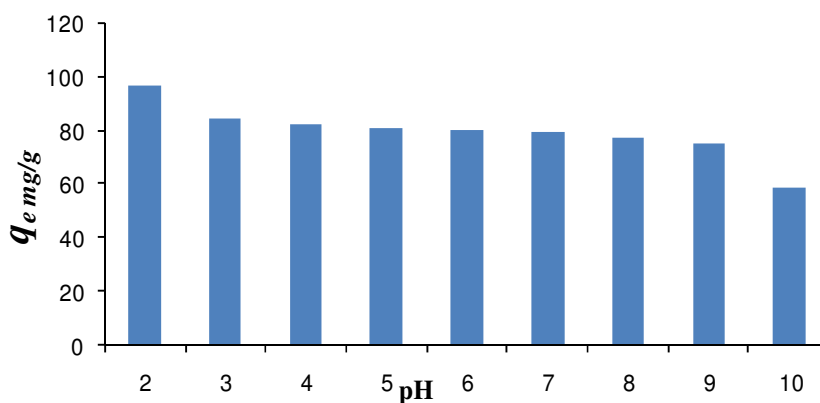


Fig.-2: Effect of pH on % of elimination of Reactive yellow 86 by BANCM

### Influence of pH

The arrangement of experiments conducted to find the effect of pH on sorption. It was observed that pH influences BANCM surface dye essential sites and the dye chemistry in water. Fig.-2 show the measure of dye removed, using acid activated sorbent at initial pH value. In this testing, the initial dye concentration was fixed at 20 ppm. From the quaver flask experiments, improved color removal of the dye, Reactive yellow 86, was observed at pH of 6. The uptake of Reactive yellow 86 was established to be best at pH 6 with the maximum dye uptake of 89%. As the external charge density decreases with an increase in the

solution pH, the electrostatic repulsion between the positively charged dye and the surfaces of sorbent is reduced, this causes more sorption<sup>16</sup>.

### Influence of concentration

The group sorption experiments were carried out by using three diverse concentrations of dye viz. 20mg/L, 40mg/L and 60mg/L at pH 6. The reaction temperature of 30 °C was chosen for sorbent. The rate of confrontation was maintained constant at 200 rpm. The colorful profiles were obtained using the absorbent BANCM.

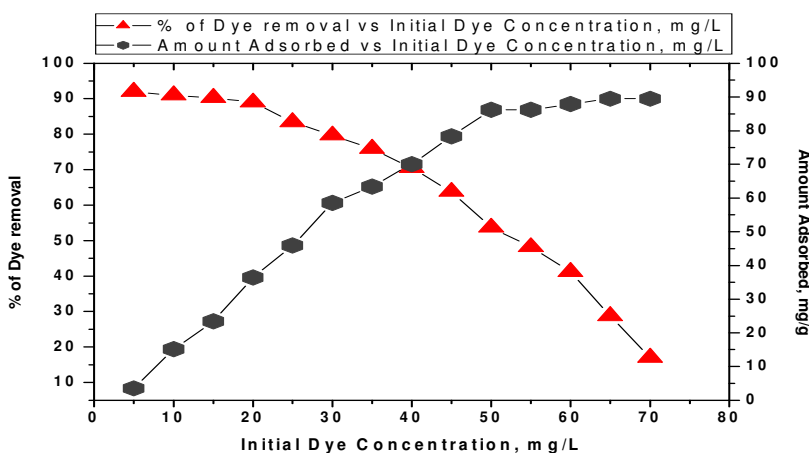


Fig.-3: Effect of concentration on adsorption of Reactive yellow 86 on BANCM at pH 6.

### SEM investigation

The SEM of the sorbent revealed in Fig.-4 open to the elements that, it is exceedingly permeable in nature. From the SEM consequences, it was found that there are matching holes and cave category openings on the facade of the sample that would completely have greater than previous to the surface area<sup>17</sup>.

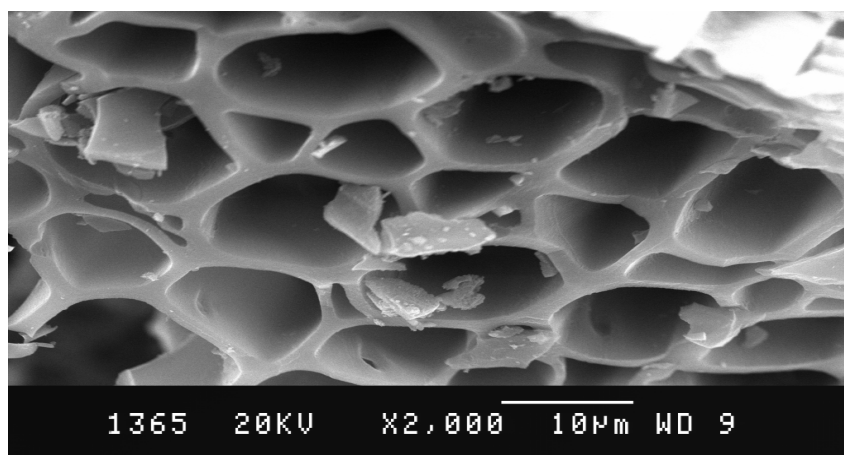


Fig. -4: SEM investigation for BANCM

### XRD investigation

Figure- 5 shows the extensive angle XRD prototype for nanoporous carbon sample. The XRD study of nanoporous carbon proved that the carbon equipped by acid behavior shows the X-ray diffraction angle  $2\theta = 23$  it is similar to the reported graphitization timbersquander<sup>18</sup>.

### FT-IR investigation

The FT-IR spectrum of the *Balsamo dendron caudatum* wood squander activated nano porous carbon prepared by a range of treatment processes shown in Fig.-6 revealed that the carbons evaluated contain four classes of surface groups: carboxyls, lactones, phenols and carbonyls.. Shifts in sorption location may be caused by factors such as intramolecular and intermolecular hydrogen bonding, steric consequence and number of-conjugation<sup>19,20</sup>.

### TGA-DTA investigation

The Thermal stability of the carbon materials prepared by sulphuric acid was analyzed by the TG&DTA are shown in Figure 7. The curve obviously exemplifies that the carbon samples begin to drop weight at about 60° C due to the volatilization of tiny molecules and it started to lose weight intensively above 600° C could be due to the decomposition of polymeric molecules formed through the carbonization process.

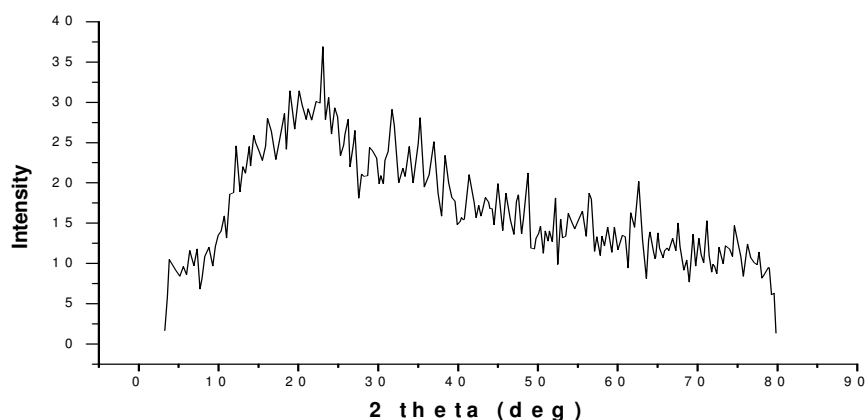


Fig. -5:XRD pattern for BANCM

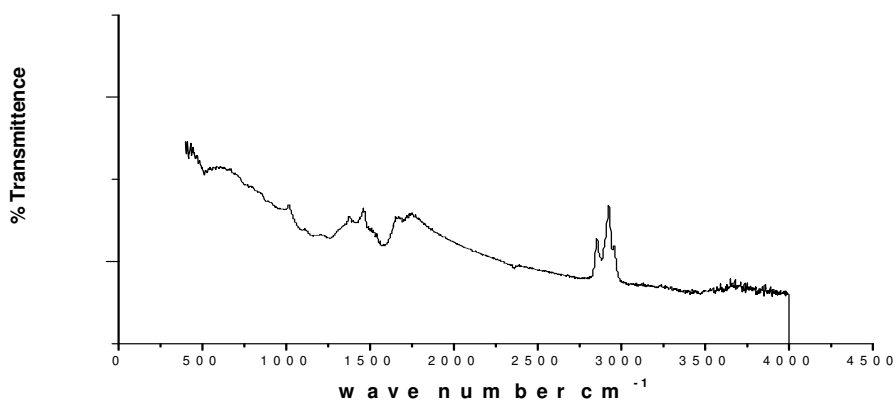


Fig.-6:FTIR Spectra for BANCM

### Influence of the Temperature on Kinetic Rate Constant and Rate Parameters

Adsorption test was conducted with fixed initial dye concentration (20mg/L) at pH 6 and at a variety of temperature viz. 30 °C, 45 °C and 60 °C. The examination of the data in (Table-1) reveals that the influence of the temperature of the dye has very little control on the pseudo second-order rate constants. The Table-2 also reveals that the influence of the temperature of dye on Elovich and pseudo first order

rate constant is neither substantial nor little. It is apparent that the sorption of dye on the BANCM waste activated carbon is best described by first-order rate equation with regression coefficient value is greater than 0.99.

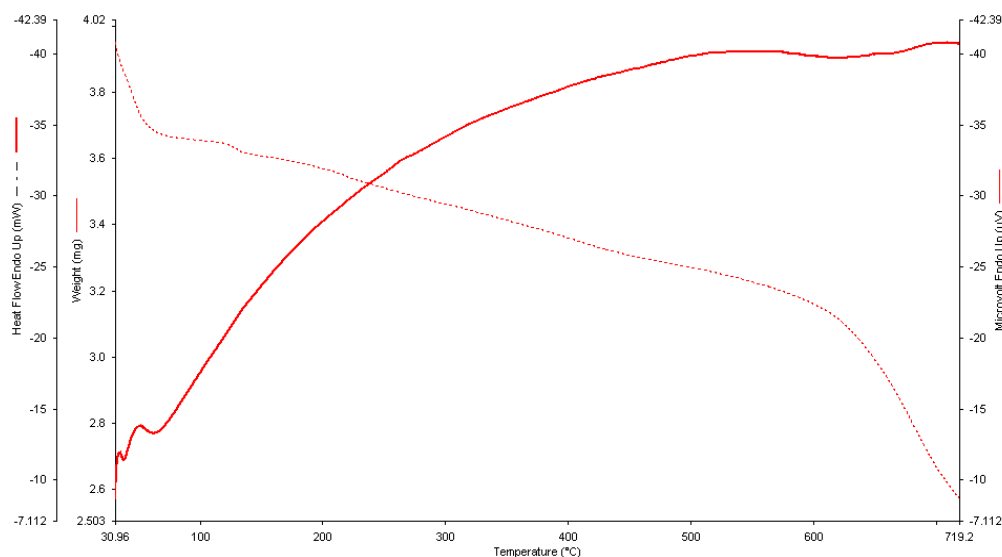


Fig.-7: TGA Curve for BANCM

Table- 2: The sorption kinetic model rate constants for BANCM various temperature

Sorbent	Initial Temperature	Pseudo first order		Pseudo Second order			Elorich Model		
		$k_1$ $l\text{min}^{-1}$	$r^2$	$k_2$ $g\text{ mg}^{-1}\text{ min}^{-1}$	$h$ $mg\text{ g}^{-1}\text{ min}^{-1}$	$r^2$	$\beta$ $g\text{ min}^{-1}$	$\alpha$ $mg\text{ g}^{-1}\text{ min}^{-1}$	$r^2$
BANCM	30°C	0.0124	0.9268	0.00787	0.4237	0.9237	0.1678	0.5345	0.9887
	45°C	0.0075	0.8258	0.0286	5.4469	0.4563	0.1928	0.62467	0.93567
	60°C	0.0344	0.6689	0.0344	0.1157	0.6367	0.4956	0.4359	0.9789

### Isotherms

The Langmuir, Freundlich isotherms are the most commonly used two-factor models in the literature connecting the non-linear balance between the amount of dye adsorbed on the acid treated (BANCM)( $q_e$ ) and the equilibrium concentration of the solution ( $C_e$ ) at a constant temperature ( 30°C).

### Langmuir Model

Langmuir model was developed based on the suggestion of the arrangement of a monolayer of the adsorbate class onto the surface of the element of the adsorbent. It has also been assumed that the surface sites are totally actively homogeneous. But in the true sense, the sorbent surface is actively heterogeneous<sup>21</sup>. This model is the most widely used two-parameter equation, normally expressed in the form by the subsequent equation:

$$\frac{1}{q_e} = \frac{1}{Q_o K_L} + \frac{C_e}{Q_o} \tag{5}$$

Where,

- $q_e$  = the quantity of dye removed at equilibrium (mg/g)
- $C_e$  = the equilibrium concentration of dye (mg/L)
- $Q_0$  = the Langmuir constant, related to the adsorption capability (mg/g)
- $b$  = the Langmuir constant, related to the energy of sorption (L/mg)
- $K_L$  = direct measure of the intensity of the adsorption (L / mg)

$C_e/q_e$  was plotted against  $C_e$  using linear deterioration examination, as shown in Fig.-7. The constants  $Q_0$  and  $K_L$  were resolute from the intercept and slope of the linear plots, correspondingly. As shown in Table-4, the  $Q_0$  from the Langmuir isotherm were 149.15mg/g for Reactive yellow 86. The values of  $K_L$  it could be concluded that sorptions of acid dye ( $K_L = 0.08838$ ). The necessary feature of Langmuir equation can be expressed in terms of a dimensionless division factor  $R_L$ <sup>22</sup>. The essential uniqueness of Langmuir isotherm can be uttered in terms of a dimensionless parameter,  $R_L$ , which is defined by  $R_L = 1/1 + bC_0$ , where,  $C_0$  is the initial dye concentration (mg/L) and  $b$  is the Langmuir constant (L/mg). The parameter indicates the form of isotherm as given in Table-3.

Table -3: Parameters for types of Isotherm

$R_L$	Type of isotherm
$R_L > 1$	Unfavourable
$R_L = 1$	Linear
$0 < R_L < 1$	Favourable
$R_L = 0$	Irreversible

In the current research work, the researcher aims at shaping how well the Langmuir model can be applied to the chosen adsorbate –sorbent structure.

$$R_L = (1/1+K_L C_0) \quad (6)$$

Where,

$C_0$  = (mg /L) is the first dye concentration.

$R_L$ = the nature of the adsorption process.

Table- 4: Equilibrium isotherm constants at 30°C

Freundlich isotherm			Langmuir isotherm		
$K_f$ (mg/g)	$1/n$	$R^2$	$K_L$ /mg	$q_0$ mg/g	$R^2$
6.0455	0.5312	0.9989	0.08838	149.15	0.9989

The intended  $R_L$  values of acid dye are found to be between 0.3857, 0.3286 and 0.3351 for dye concentrations viz. 20 mg/L, 40 mg/L and 60 mg/L, respectively (data not shown). The extent of the  $R_L$  values, i.e.,  $0 < R_L < 1$ , indicated the good sorption of each of the dye.

### Freundlich Model

At Equilibrium conditions, the adsorbed amount,  $q_e$  can also be predicted by using the Freundlich equation<sup>23</sup>:

$$q_e = k_f C_e^{1/n} \quad (7)$$

Where,

$q_e$  = dye concentration in solid at balance (mg/g)

$C_e$  = dye concentration in solution at balance (mg/L)

$k_f$  = measure of adsorption capacity

$n$  = adsorption intensity

A logarithmic form of the above equation is

$$\log q_e = \log k_f + (1/n) \log C_e \quad (8)$$

The ideals of  $n$  and  $k_f$  were stubborn from the plot  $\log C_e$  vs  $\log q_e$ . Where,  $k_f$  is the idea of the sorbent capacity and  $1/n$  is a compute of surface heterogeneity, ranging between 0 and 1, attractive more various as its value gets nearer to zero. The Freundlich equation predicts that the dye concentration on the sorbent will hoist so long as there is an expansion in the dye concentration in the liquid. The investigational evidence indicates that an isotherm is reached at a limiting value of the solid phase concentration. The equation itself does not have any real physical significance. Freundlich isotherm fitted well to the data with correlation coefficient value 0.9871. The designed Freundlich isotherm constants at 30°C are as shown in Table 4. The value of Freundlich model  $n = 1.7227$  lying in the array of 1 - 10, designate sympathetic sorption.

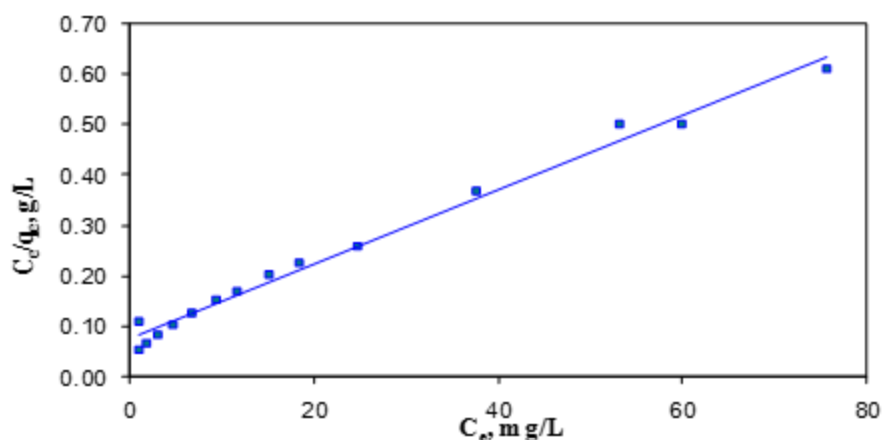


Fig.-8: Langmuir plot for Reactive yellow 86 adsorption onto BANCM. M, 100 mg; V, 50 ml;  $C_0$ , 20 mg/L; pH, 6.5; temperature, 30°C )

## CONCLUSION

Sorption of Reactive yellow 86 dye on the BANCM was determined to be reliant on the pH, (The most favorable pH of Reactive yellow 86 was 6), temperature and concentration of sorbent. Adsorption equilibrium was reached within 220 min contact time for reactive yellow 86 dye used in this experiment. The entitlement saturation was found to be almost 99% for the BANCM correspondingly. The kinetics of Reactive yellow 86 sorption on adsorbent was found to follow a pseudo-first-order rate equation. The sorbent was employed to adsorb Reactive yellow 86 from aqueous solution explicitly and showed high removal capability at fitting conditions, indicating that the secondary sorption was an efficient and low-priced way for recycling of the used sorbents. A stability isotherm for the adsorption of Reactive yellow 86 on BANCM was analyzed by the Freundlich, and Langmuir isotherm equations. The absolute result showed that the Freundlich isotherm best-fit the Reactive yellow 86 sorption.

## REFERENCES

1. E.A. Astolfi, A. Maccagn, J. C. Garcia-Fernandez, R. Vaccaro and R. Stimolo, *Biol. Trace Elem. Res.*, **3**, 133 (1981).
2. J. Yiamouyiannis and D. Burk, *Flouride*, **10**, 102 (1977).
3. A. Afkhami, M.S. Tehrani and H. Bagheri, *Desalination*, **263**, 240 (2010).
4. F. Deniz and S. Karaman, *Chem. Eng. J.*, **170**, 67 (2011), DOI: 10.1016/j.cej.2011.03.029.
5. V. S. Mane, I.D. Mall and V.C. Shrivastava, *Dyes Pigments*, **73**, 269 (2007).



6. V. S. Mane, I.D. Mall and V.C.Shrivastava, *J Environ Manage*, **84**, 390 (2007), DOI:10.1016/j.jenvman.2006.06.024.
7. Arwa Abdelhay, Abeer Al Bsoul, Amani Al-Othman, Nada M Al-Ananzeh, InshadJum'hAhmed A Al-Taani, *Adsorption Science and Technology*, **25**,46,(2017), DOI: 10.1177/0263617416684347.
8. Zhong-Pan Hu, Ze-Min Gao, Xinying Liu, Zhong-Yong Yuan, *Adsorption Science and Technology*, **27**,62,(2017), DOI: org/10.1177/0263617416684348.
9. Dayeon Choi Sooho Ham Du-Jeon Jang, *Journal Environmental Chemical Engineering*, **6**,1 (2018).
10. M. Bansal, D.Singh and V.K. Gargb, *J Hazard Mater*, **171**,83, (2009).
11. A. Demirbas, *J Hazard Mater*, **167**, 1(2009), DOI:10.1016/j.jhazmat.2009.01.081.
12. S. Lagergren, *Handlingar*, **24**,1 (1898).
13. Y.S. Ho, G.Mckay, D.A.J. Wase and C.F. Foster, *Adsorp. Sci .Technol*, **18**,639 (2000).
14. S .H.Chien and W. R.Clayton, *Soil. Sci. Soc. Am. J.*, **44** ,265 (1980).
15. P.C. C Fariaa, J. J. M. O.Rfao, M. F. R. Pereira, *Water Res.*, **38**, 2043 (2004).
16. R. J.Krupadam and R.Sarin, *Res. J. Chem. Environ.*, **7**,13(2003).
17. S. D. Khattri and M.K.Singh, *Water Air Soil Pollut.*, **120**, 283 (2000).
18. S.P.S.Syed, *Res. J. Chem. Sci.*, **1**, 89 (2011).
19. D.Kendall, *Applied Infrared Spectroscopy*, Reinhold Publishing Corp. Chapman & Hall, Ltd, London, 560 (1996).
20. J. Zawndski, *Carbon*, **19**, 19 (1981).
21. I. Langmuir, *J. Am. Chem. Soc.*, **40**, 1361 (1918).
22. S. Wang , Y. Boyjoo, A. Choueib and H. Zhu, *Water Res.*, **39** ,129 (2005).
23. H. Freundlich, *London.Methuen*, (1926), DOI:org/10.1002/jctb.5000454407.

[RJC-3018/2018]